(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 3 June 2004 (03.06.2004)

PCT

(10) International Publication Number WO 2004/045834 A1

(51) International Patent Classification⁷: D21F 7/08

B29C 67/00,

(21) International Application Number:

PCT/EP2003/013295

(22) International Filing Date:

21 November 2003 (21.11.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0227185.6

21 November 2002 (21.11.2002) GI

- (71) Applicant (for all designated States except US): VOITH FABRICS PATENT GMBH [DE/DE]; Sankt Pöltener Strasse 43, 89522 Heidenheim (DE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): SAYERS, Ian, Christison [GB/GB]; 30 Chesterbrook, Ribchester, Nr. Preston, Lancashire PR3 3XT (GB). HAY, Stewart, Lister [GB/GB]; 12 Heapworth Avenue, Ralmsbottom Bury, Lancashire BLO 9EH (GB).


- (74) Common Representative: VOITH FABRICS PATENT GMBH; Sankt Pöltener Strasse 43, 89522 Heidenheim (DF)
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: THREE DIMENSIONAL TOMOGRAPHIC FABRIC ASSEMBLY

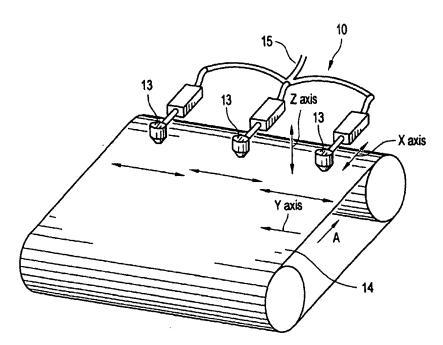

(57) Abstract: A method of making a fabric, by selective deposition modelling or fused deposition modelling, comprises feeding material from at least one nozzle onto a moveable belt (14). The nozzle (13) is moveable for translational movement and the spacing between the nozzle (13) and the belt (14) is adjustable. The flow through the nozzle (13) and translational movement of the nozzle (13) is controlled such that the nozzle (13) dispenses the material in a controlled manner to form the fabric layer-by-layer.